

RLM G5i Performer



With its compact design and sealed optics, the RLM G5i Performer is an ideal all-round projector suitable to both the rental as well as staging markets.

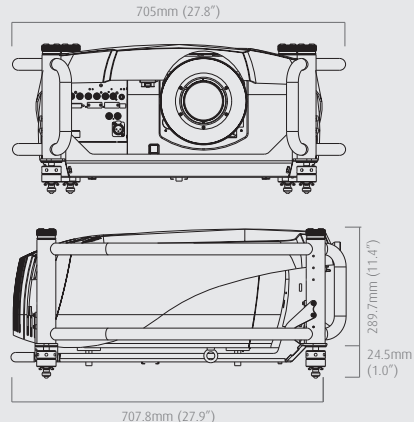
Feature-rich and ready to use, the RLM G5i Performer allows everything from seamless switching to picture-in-picture and enables you to show up to 4 sources simultaneously on-screen.

With its sealed optics (prism and DMD's), a dedicated lens range and compatibility with the existing SLM Projector lenses, the RLM G5i Performer becomes the ideal staging or corporate rental projector.

BARCO

Visibly yours

RLM G5i Performer specifications

Light output ⁽¹⁾	4,500 Ansi	DIMENSIONS 				
Resolution	1,024 x 768 (native)					
Contrast ratio	1,000:1 (full field)					
Lamp	2 x 250 W mercury					
Lamp lifetime (maximum)	1,500 Hrs					
Lamp lifetime (typical)	1,000 Hrs					
Lamp lifetime (minimum)	750 Hrs					
Max. ambient temperature	40°C (104°F)					
Power consumption	700W					
Mains voltage	92 - 240 V					
Weight projector	25 kg (56 lbs)					
Weight frame	5 kg (11 lbs)					
Dimensions (W x L x H)	705 x 707.8 x 316.6 mm (27.8 x 27.9 x 12.5 inch)					
FEATURES						
Sealed DLP core	standard					
Scenergix	standard horizontal & vertical electronic edge blending					
Advanced picture in picture	up to 4 sources simultaneous (2 data, 1 video, 1 SDI)					
INPUTS						
Input source compatibility ⁽²⁾	1,600 x 1,200 (max. input)					
Fixed inputs (standard)	1x configurable 5 cable (BNC) • 1x Composite Video (BNC) • 1x S-video (4-pin DIN) 1x analogue RGB (D15 connector) • 1x SDI (+ loop through) • 1x DVI					
ORDER INFORMATION						
Projector body (without lens)	R9010320					
Spare dual lamp	R9852940					
LENSES						
	<i>throw ratio on RLM G5i</i>	<i>throw ratio on RLM G5i</i>				
Fixed focal lenses	RLD 0.8	0.8	R9832640			
	TLD HB 0.8	1.0	R9842040			
Zoom lenses	RLD 1.5 - 1.8	1.5 - 1.8	R9832642	TLD HB 1.6 - 2.0	2.0 - 2.5	R9842060
	RLD 1.8 - 2.25	1.8 - 2.25	R9832643	TLD HB 2.0 - 2.8	2.5 - 3.5	R9842080
	RLD 2.25 - 3.0	2.25 - 3.0	R9832644	TLD HB 2.8 - 5.0	3.5 - 6.3	R9842100
	RLD 3.0 - 4.5	3.0 - 4.5	R9832645	TLD HB 5.0 - 8.0	6.3 - 10.0	R9842120
	RLD 4.5 - 7.0	4.5 - 7.0	R9832646			
	RLD adapter for TLD lenses		R9832650			

⁽¹⁾ optical spec. measurements with RLD 4.5 - 7.0:1 on axis at 220V

⁽²⁾ all current video sources in composite, S-VHS, RGB or component or Serial digital format
all current proposed HDTV, extended and improved television standards (1080i, 720p, ...)
computer and workstations with a resolution up to 1,600 x 1,200
most Macintosh computers
direct digital interfacing with current and future digital standards



BARCO

Visibly yours